



MAGNA1

VALID FROM MODEL C

Further product
documentation



net.grundfos.com/qr/i/99209952

be
think
innovate



GRUNDFOS 



MAGNA1



MAGNA1 D

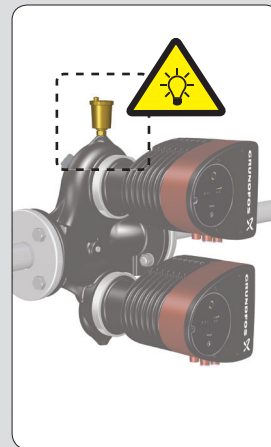



Max. 95 % RH
IPX4D



Min./Max.
-10 °C – +110 °C



PN 6:6 bar / 0.6 MPa
PN 10:10 bar / 1.0 MPa
PN 16:16 bar / 1.6 MPa






Min./Max.
0 °C – +40 °C









< 55 dB(A)




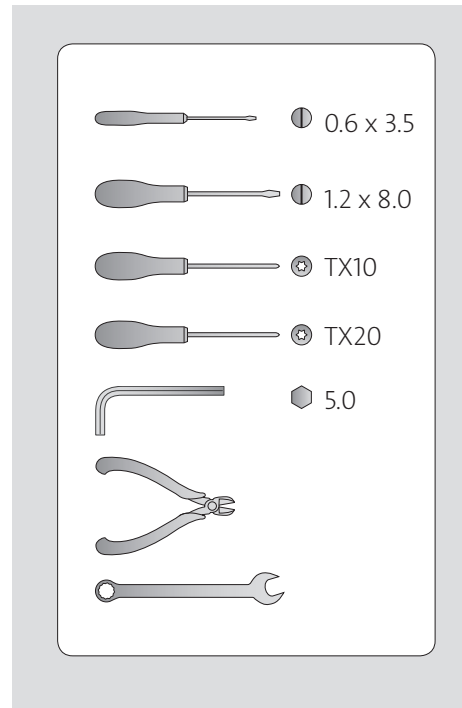
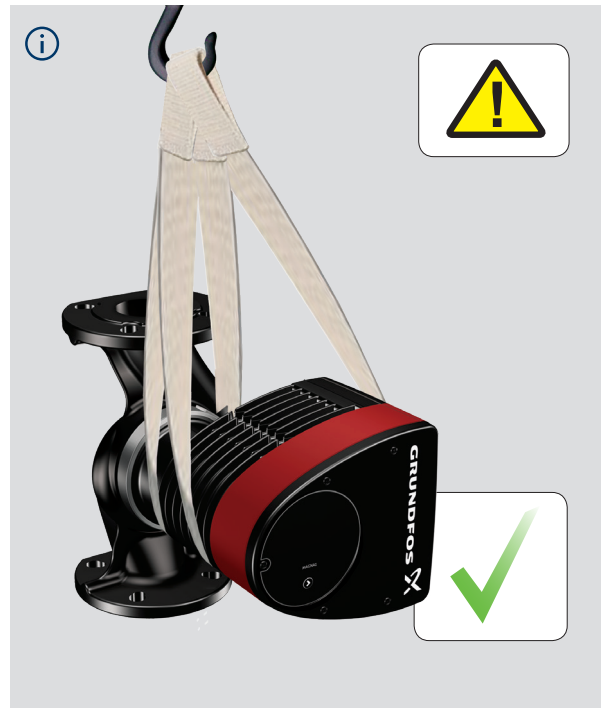


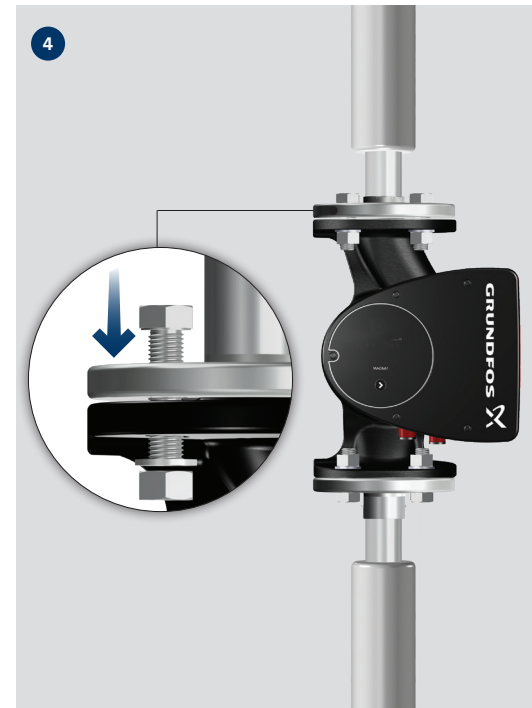

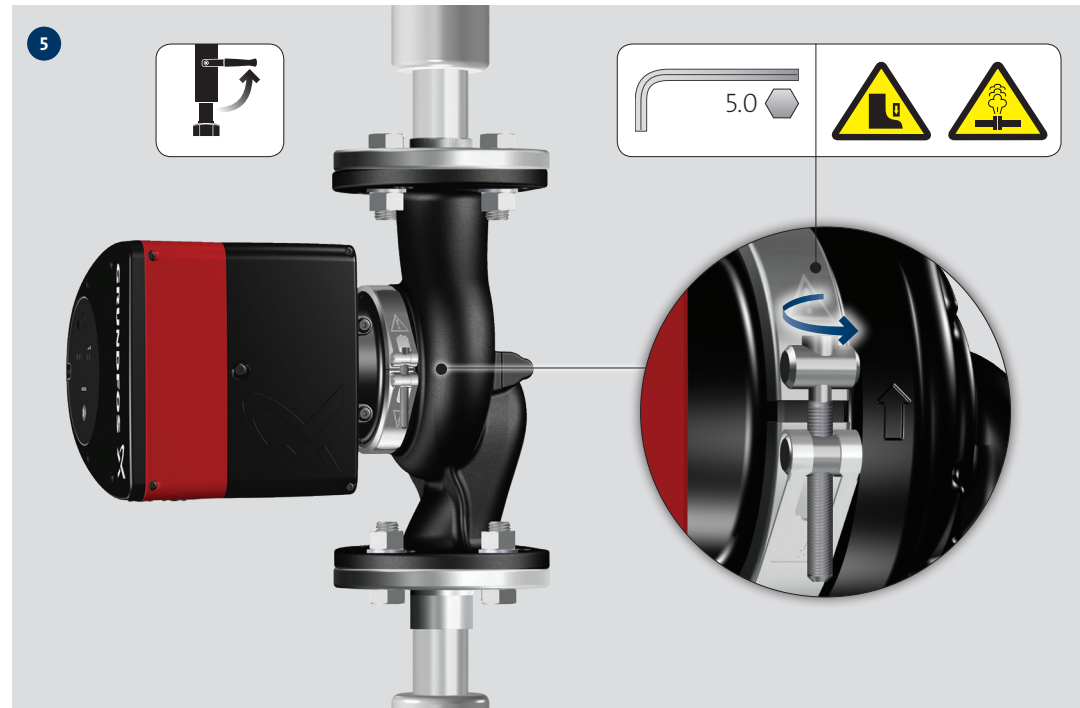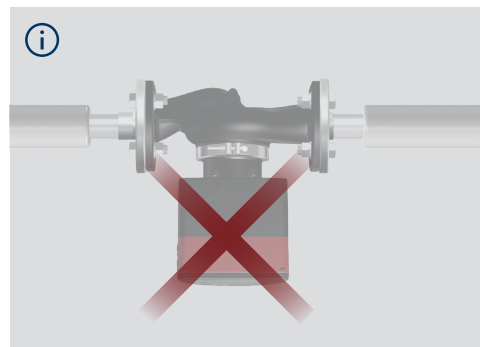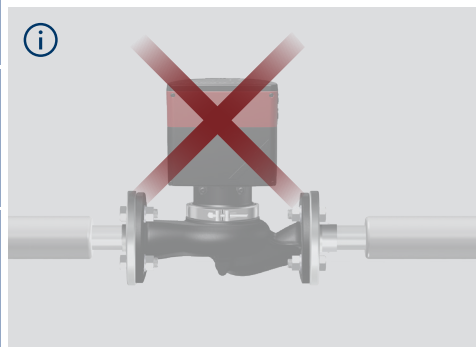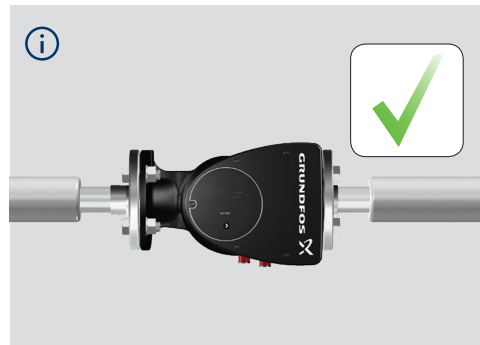
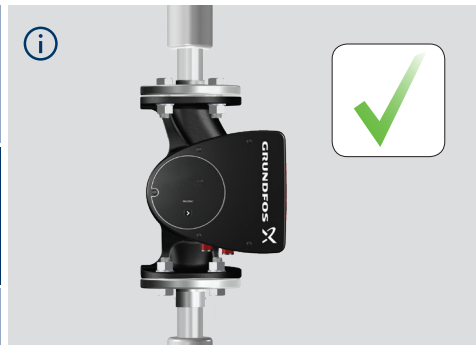


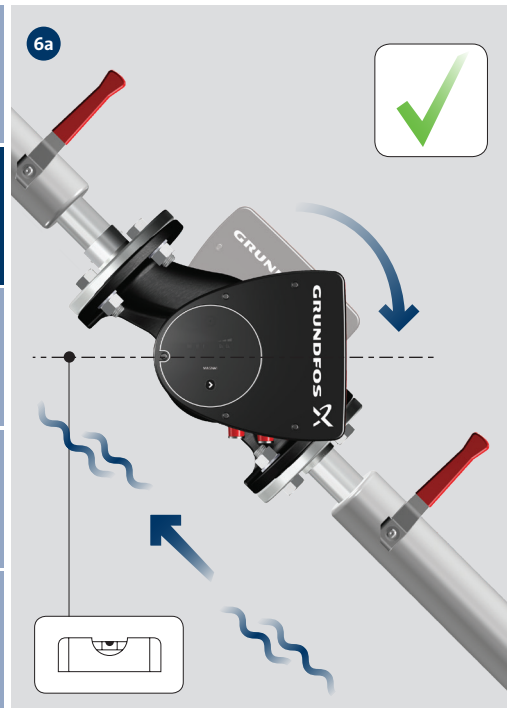

12

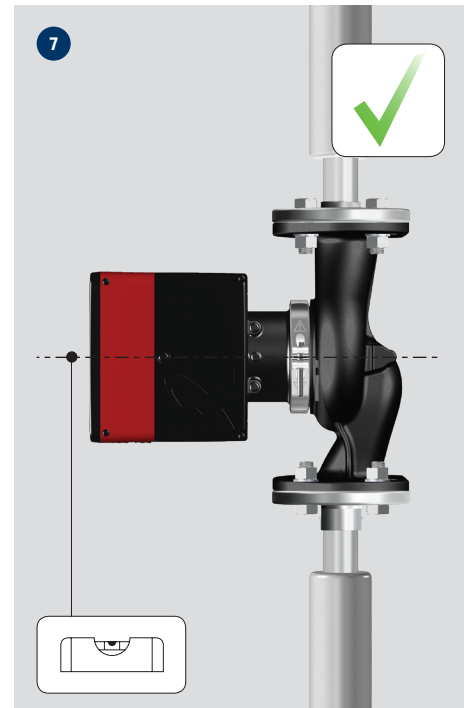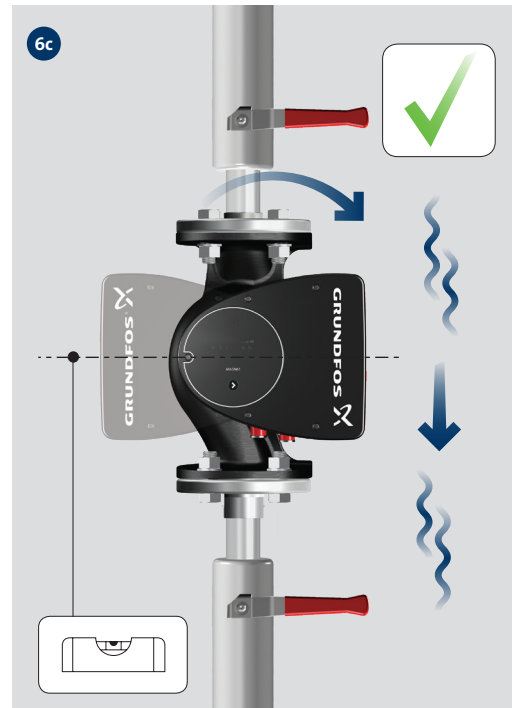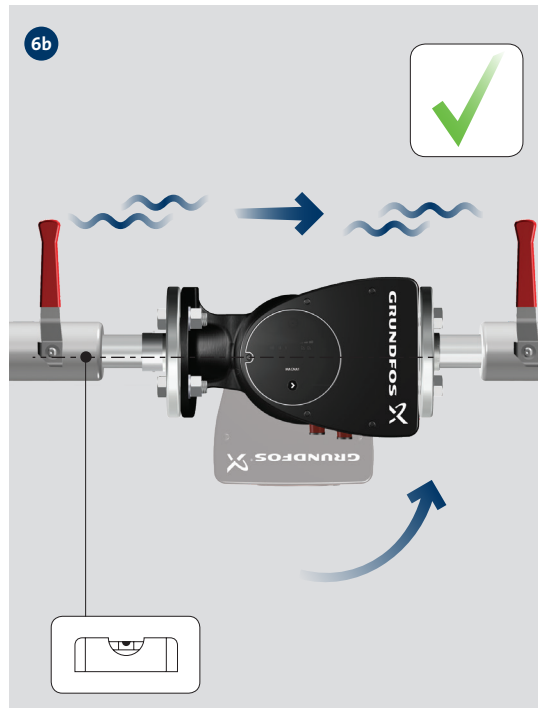

13

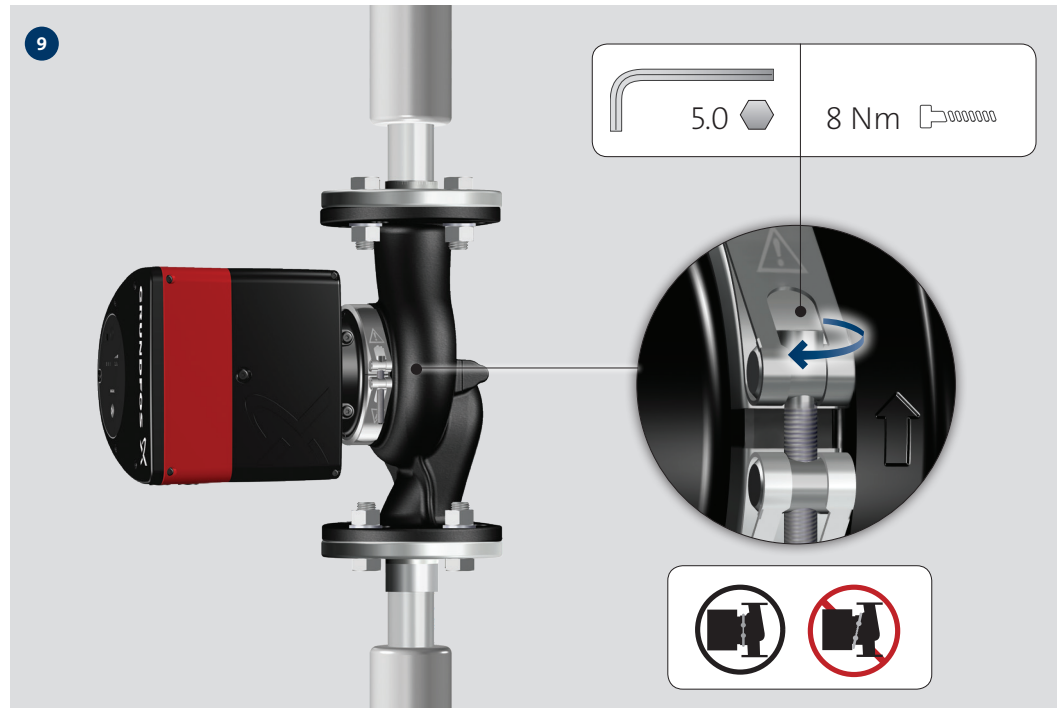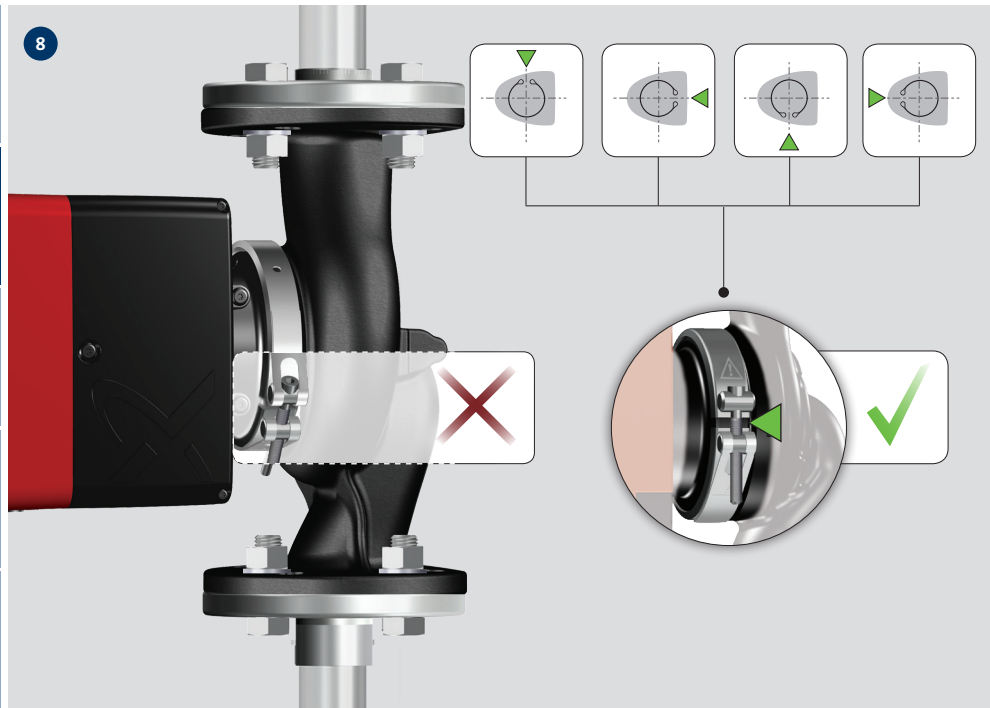



10




11












12



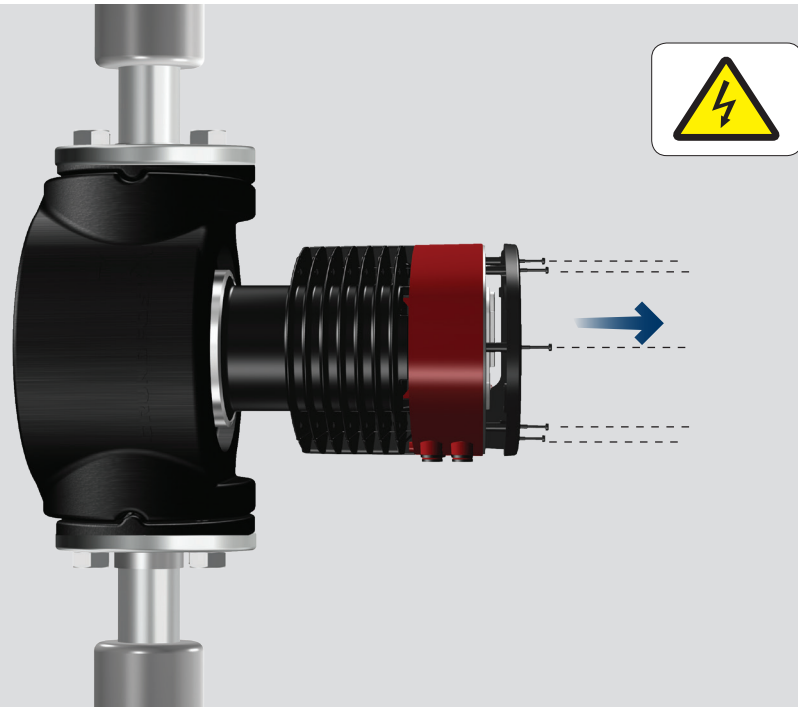





13


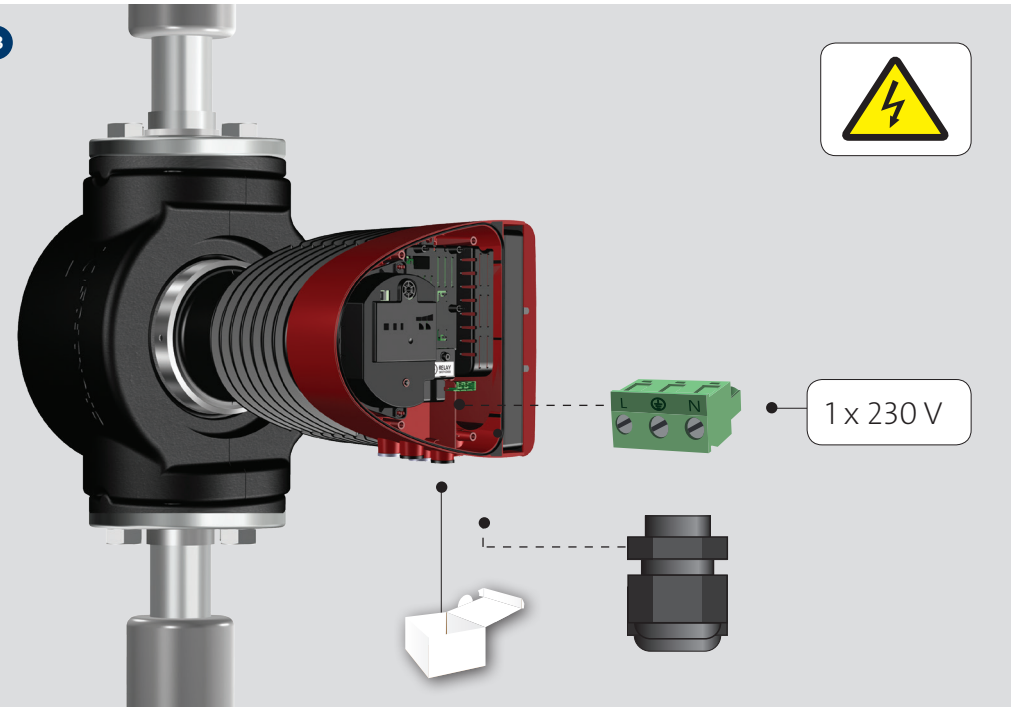


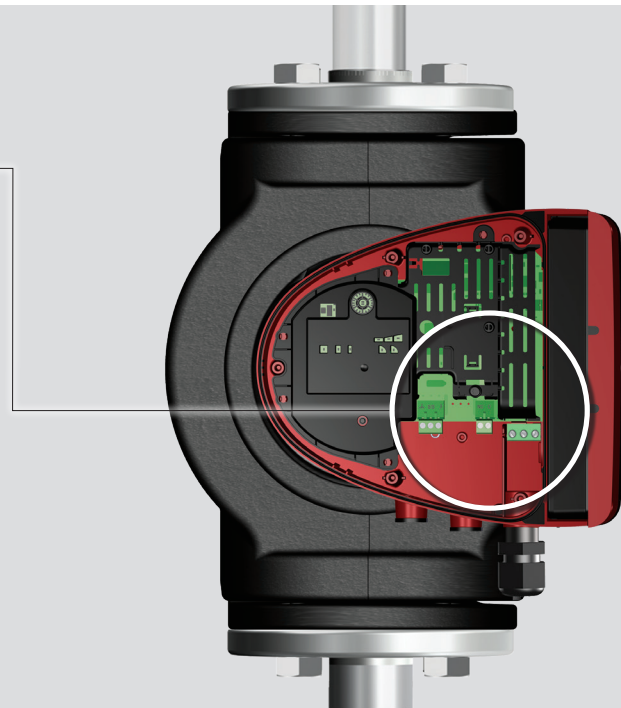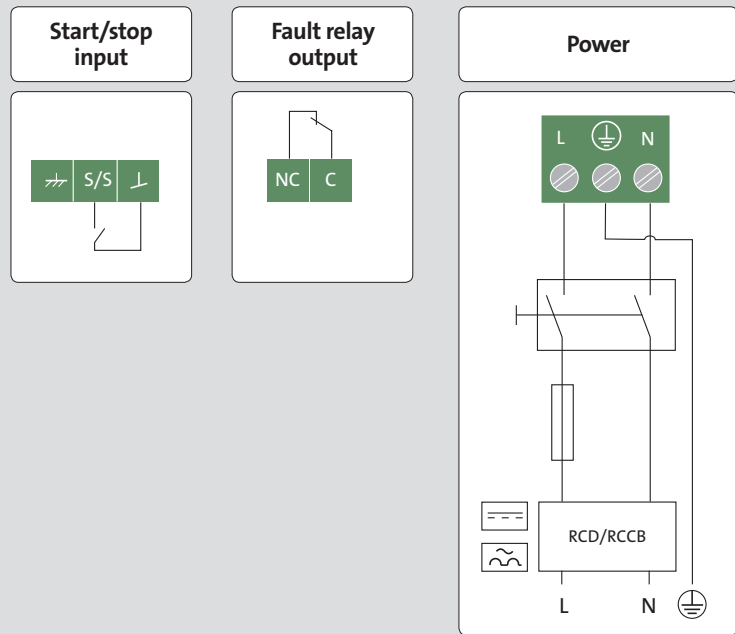

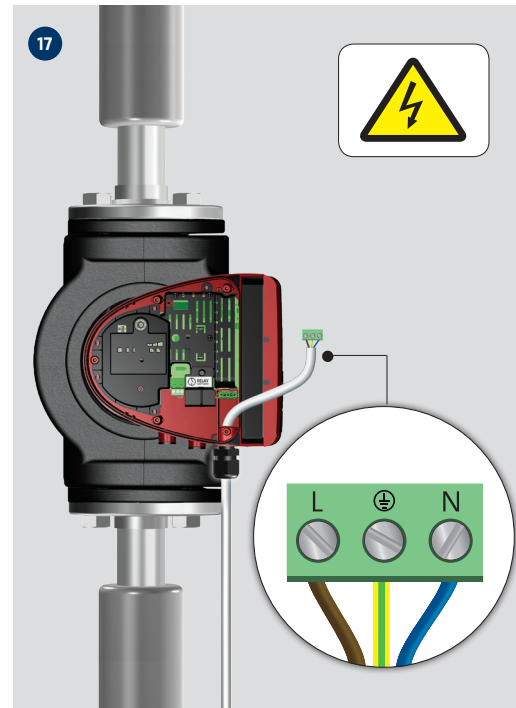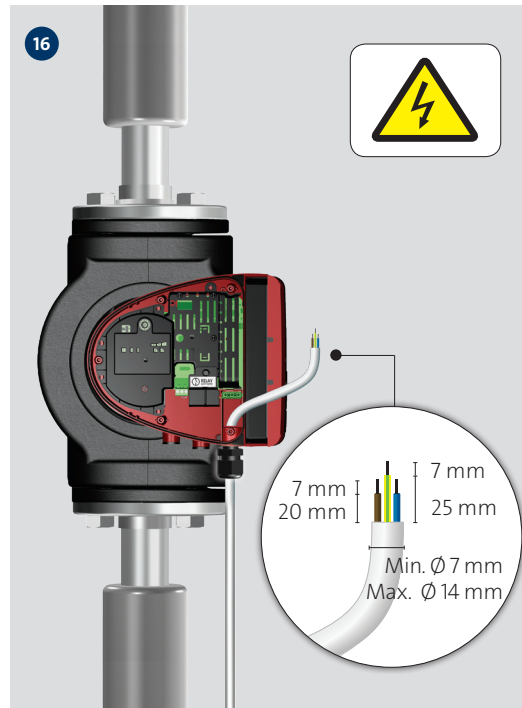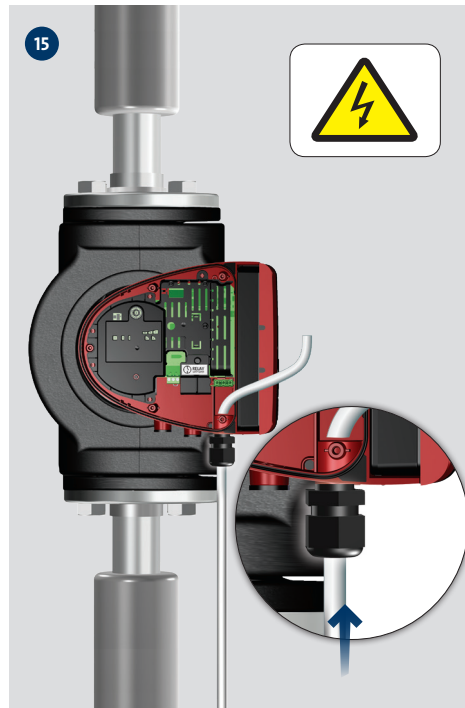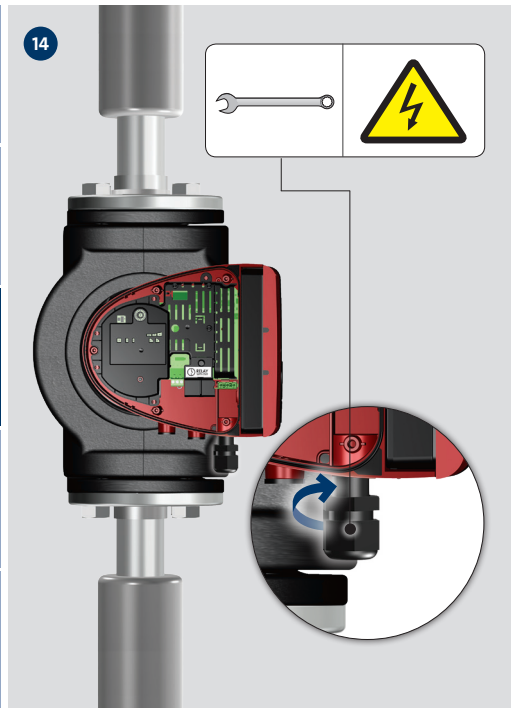

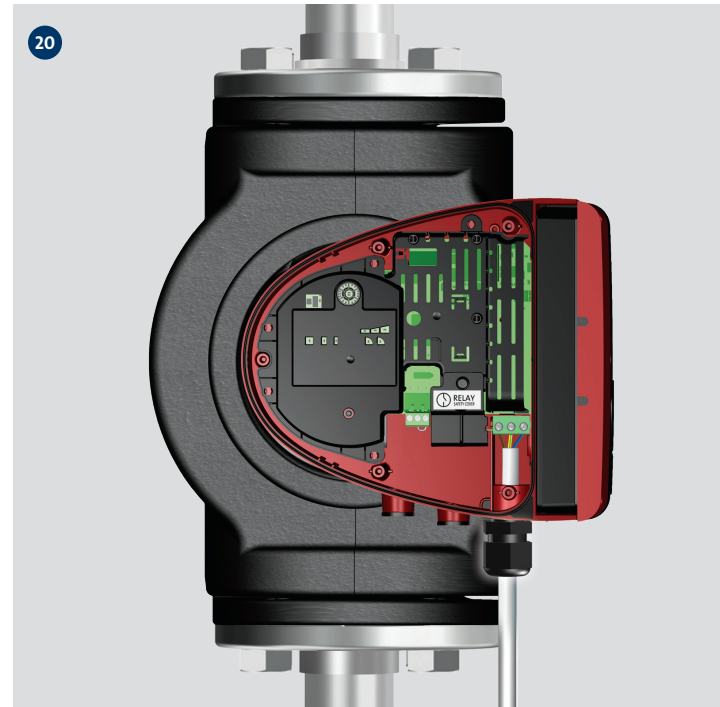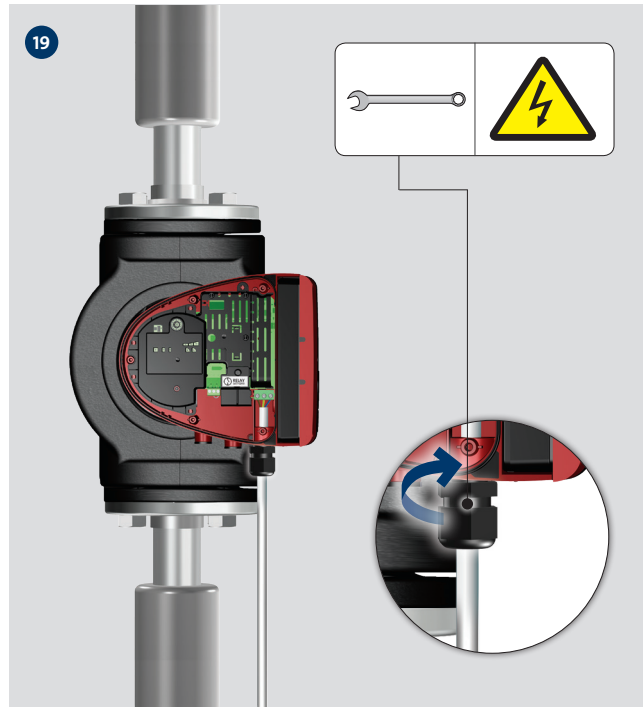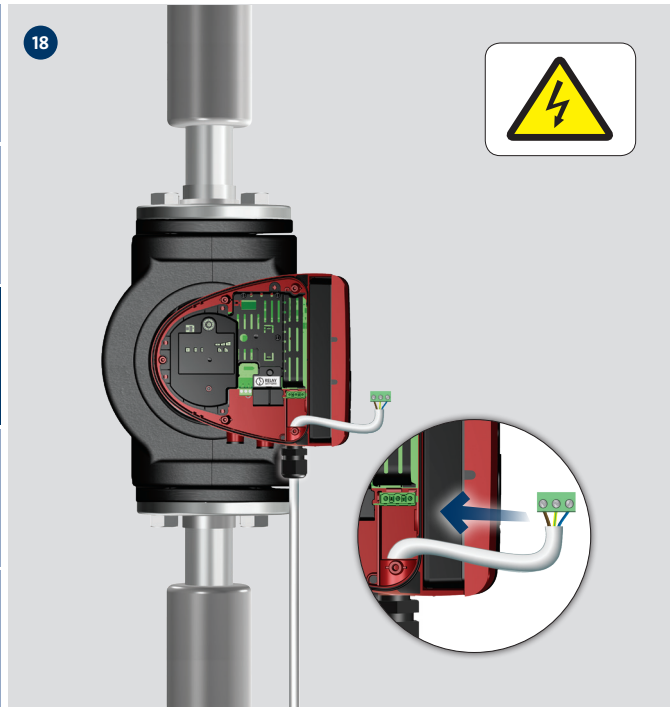


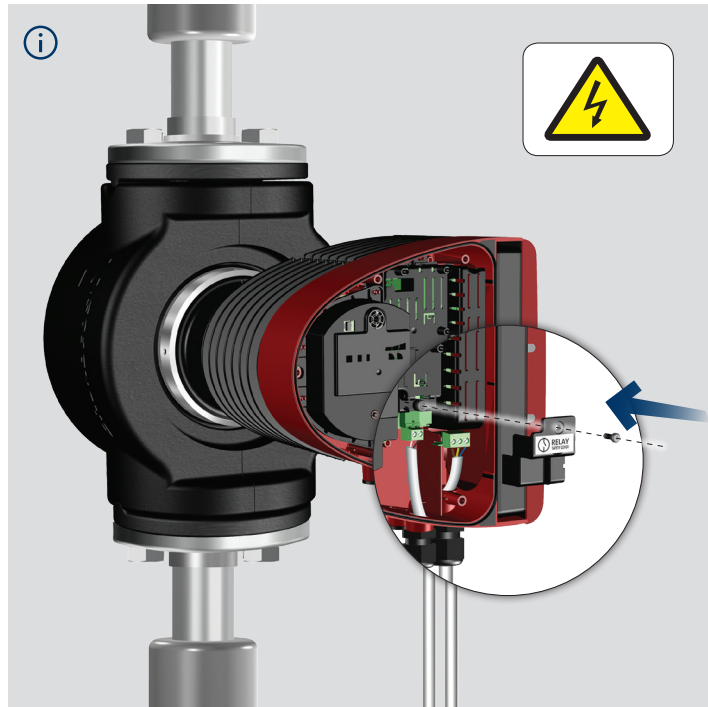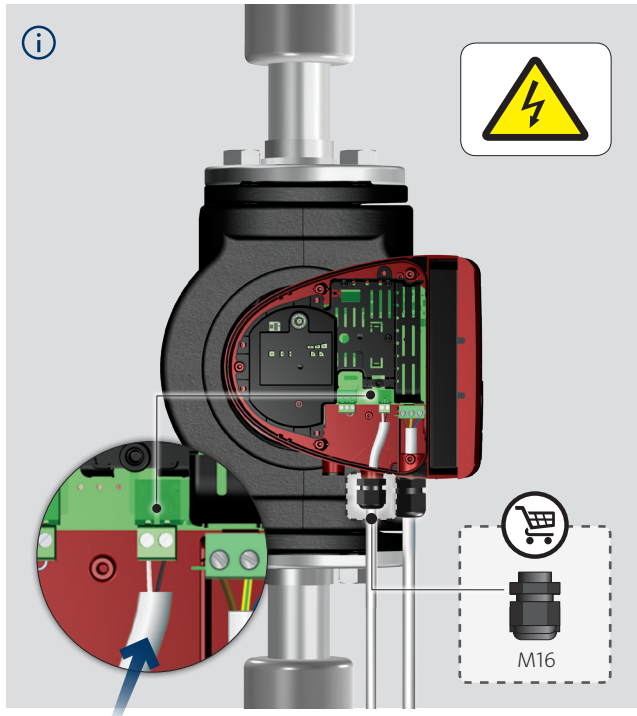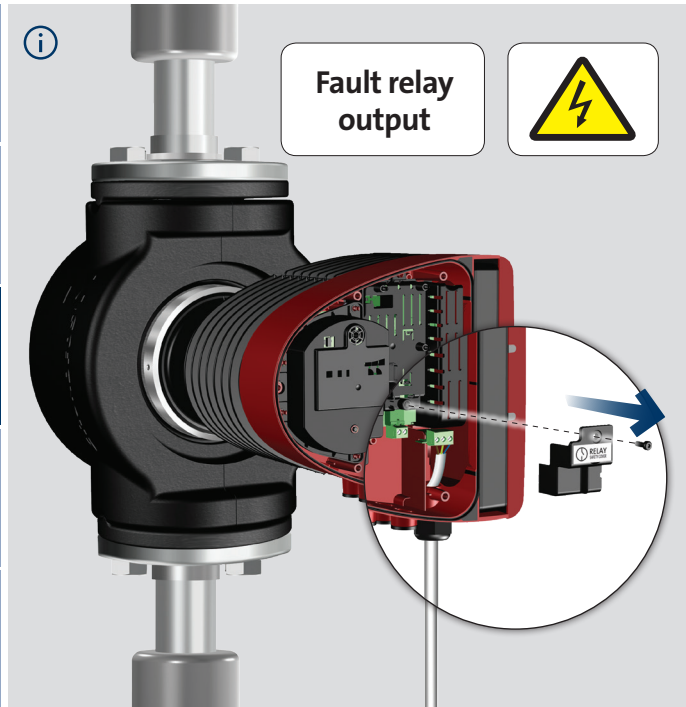

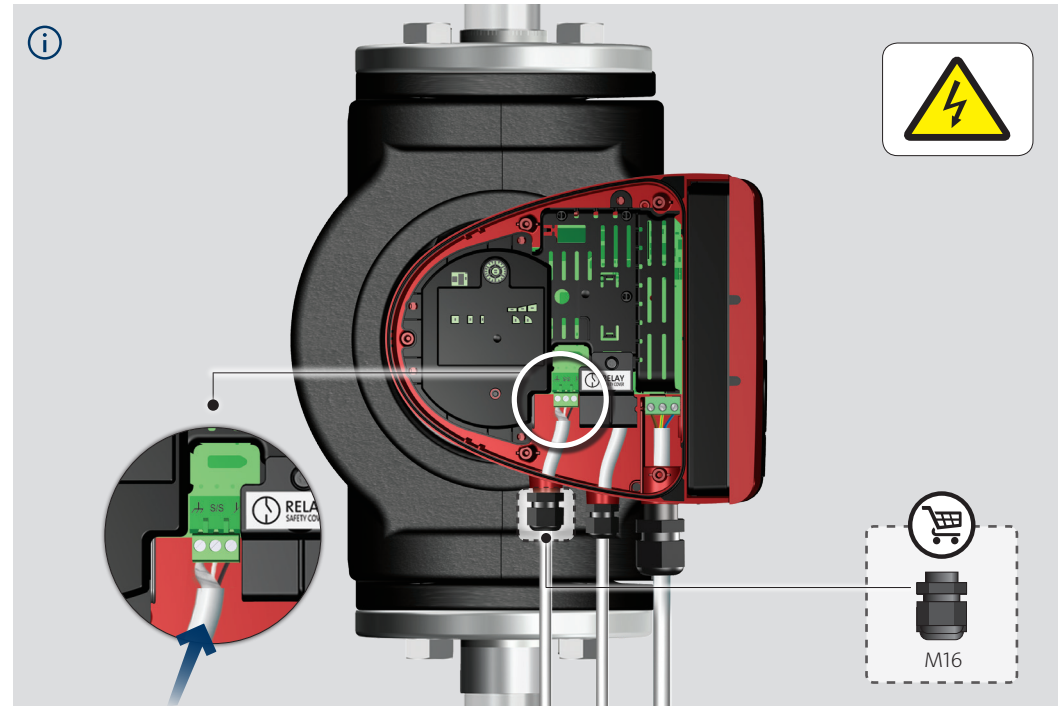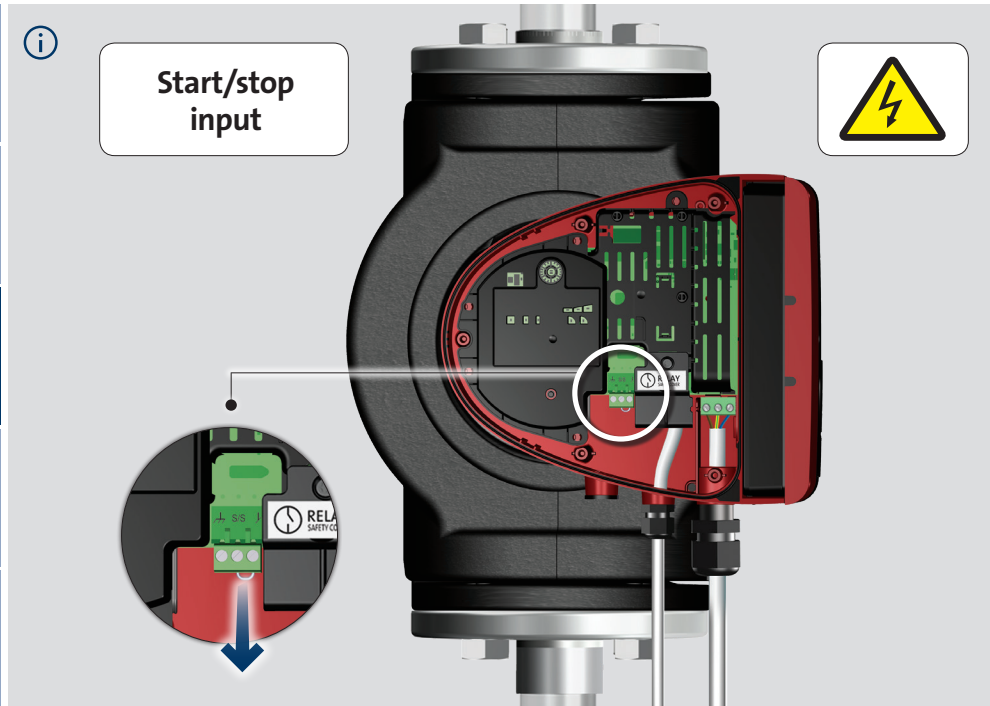



21

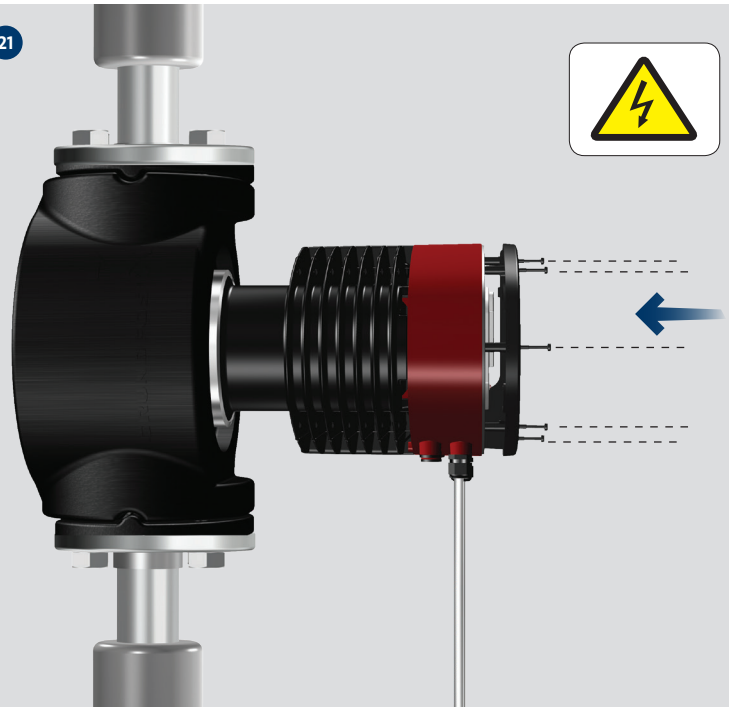

22





i




Power cycle
Max. 4 starts
per 60 minutes






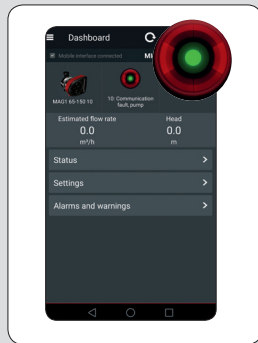

IR

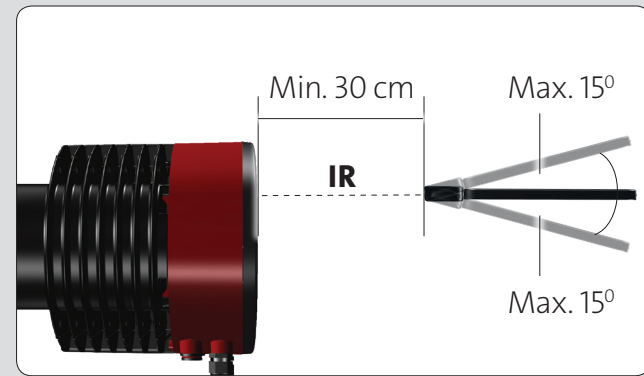

net.grundfos.com/qr/i/99209952

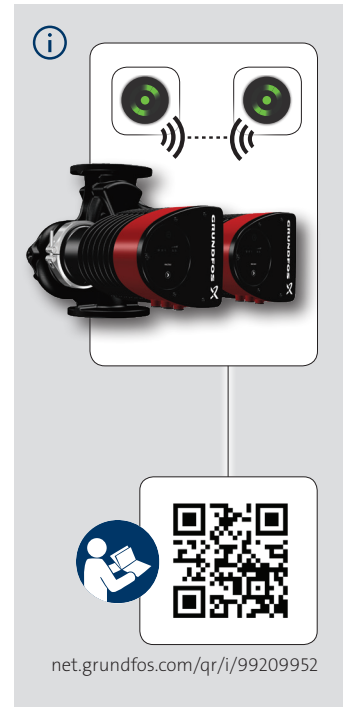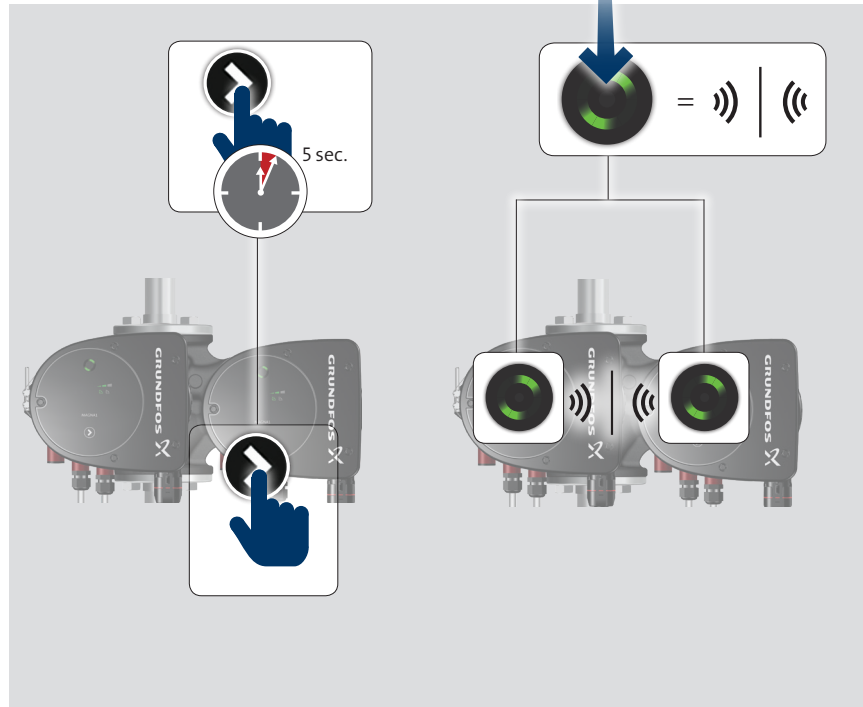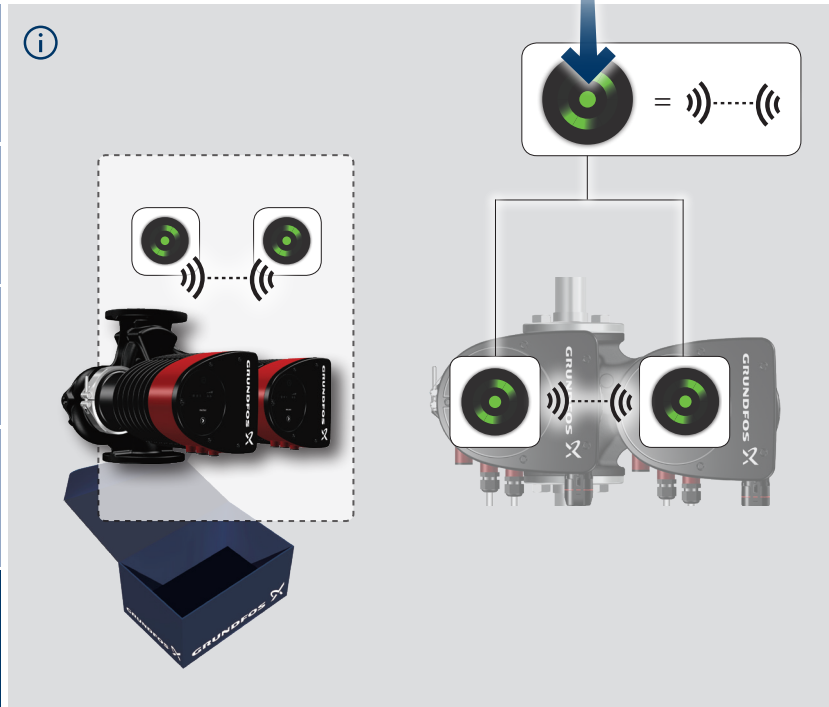

Installation date: _____

Installer:

99210934 0219

ECM: 1253737

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel: +45 87 50 14 00
www.grundfos.com