

GM 10 60 Hz

Submersible Drainage Pump



Construction

Submersible drainage pump constructed with composite polymers developed especially for this product. These new rustproof materials are resistant to corrosion, indeformable at maximum temperature differentials in the pump and motor and resistant to internal and external strain. Shaft of chrome steel AISI 430. Three lip seals in NBR. Minimum dimension and high levels of performance, for use in many different applications, for flow rates up to 200 liters/min. With float switch for automatic start/stop.

Applications

For clean or slightly dirty water.
 For draining flooded rooms or tanks.
 Extraction of water from ponds, flowing water or pits for collection of rain water.
 For irrigation purposes.
 For use outdoor, the power supply cable shall have a length not less than 10 m.

Operating conditions

Maximum liquid temperature for prolonged use: 30 °C (with immersed motor).
 Immersion depth: 5 m max (with suitable cable length).
 Not suitable for continuous duty for prolonged time.


Motor

2-pole, single-phase, 220 V, 60 Hz induction motor.
 With thermal protector.
 Capacitor inserted in the housing incorporated in the plug.
 Cable: with plug, length 5 m, 4 G 0.75 mm².
 Insulation class B.
 Protection IP 68.
 Triple impregnation humidity-proof dry winding.

Special features on request

Other voltages.
 Cable H07RN8-F, 4 G 1 mm², length 10 m.
 Control box with on-off switch and capacitor, for pumps without plug.
 Without float switch.
 With elbow on discharge port.
 Motor suitable for operation with frequency converter.

Characteristic curve n ≈ 3450 rpm

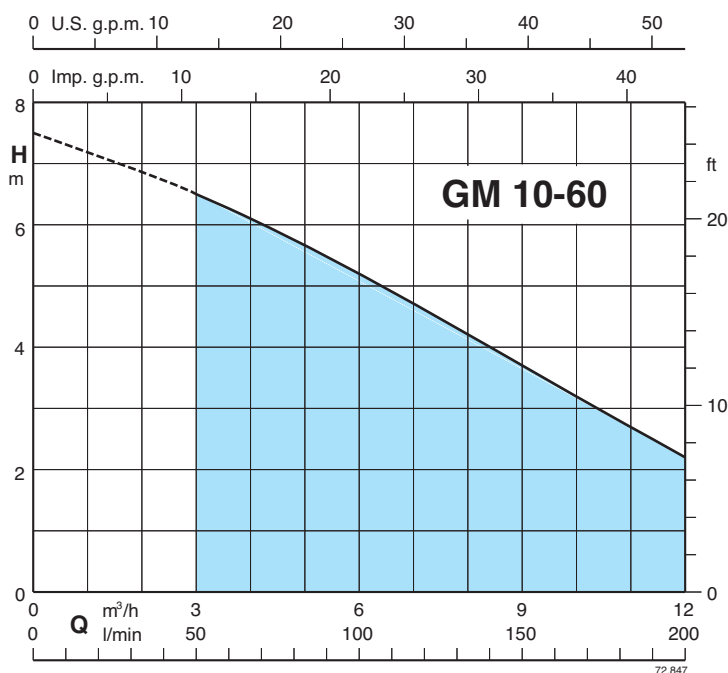

	1~	220V	Capacitor		P ₂		Q m³/h l/min	Q						
			f	V	IA/IN	kW		HP	0	3	6	9	12	
GM 10-60			2,1	6,3	450	3,1	0,3	0,4	H m	7,5	6,5	5,2	3,7	2,2




P₂ = Rated motor power output
 IA/IN = D.O.L. starting current / Rated current

Dimensions and weights


Weight kg 5

Control box (on request)

Type	Capacitor	Weight
QM 10	6,3 μ F 450 V	0,4 kg

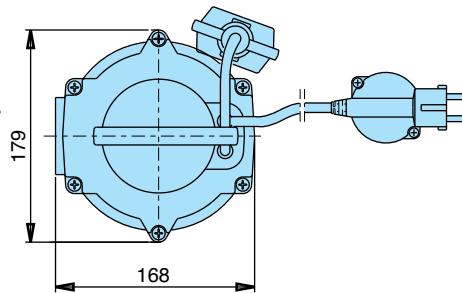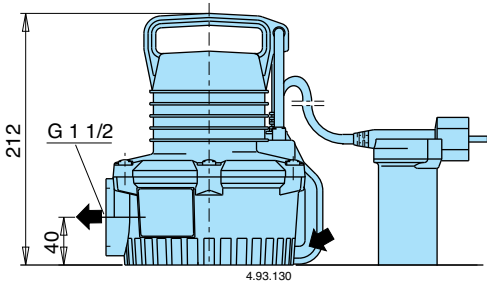

Installation examples

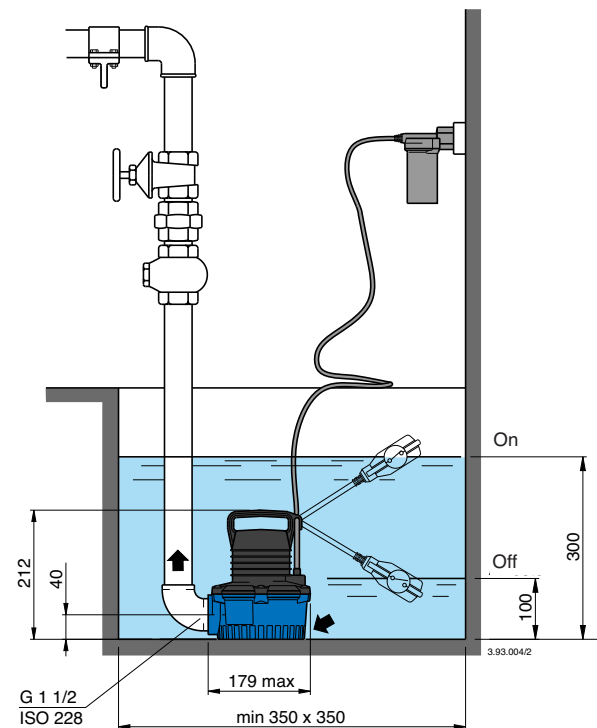

Low cost installation

Immersed without suction pipe and valve. No filling operations at start-up, no suction problems and greater safety against running dry.

Features

Maximum reliability

A metal support ensures correct alignment between the pump shaft and the motor also in heavy duty conditions.

A threaded metallic insert in the delivery port allows for secure connection of the delivery pipe or fitting without any risk of damaging the pump.

A suction strainer prevents solids bigger than 8 mm grain size from entering the pump.

